

Advanced Fast Idle System (AFIS)

Automatic High Idle System

Overview

- Automatic or manual elevation of the vehicle's RPM up to three customizable speeds
- Setting the Park brake is not required, but is a configurable feature
- The system will engage if the battery voltage drops below 12.5 volts (configurable)
- Simple plug and play connection to the OEM chassis


Features

- Dynamic Load Response (DLR) technology monitors engine RPM and maintains speed at all load conditions
- On-board LED diagnostics
- CPU performs a self-diagnosis every time the vehicle is started
- The vehicle must be in Park for the system to engage
- High idle RPM levels are field programmable


Proudly distributed by

LGS GROUP
AUTOMOTIVE TECHNOLOGIES 

(775) 831-2002

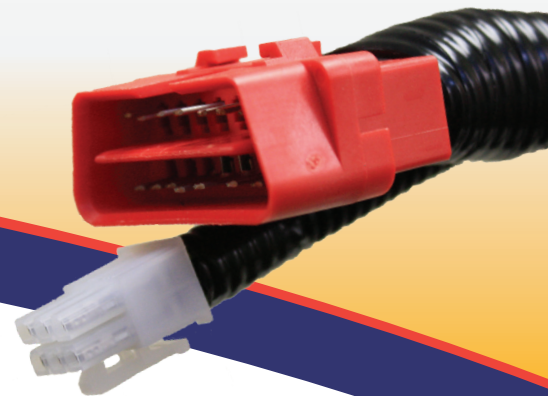

Details

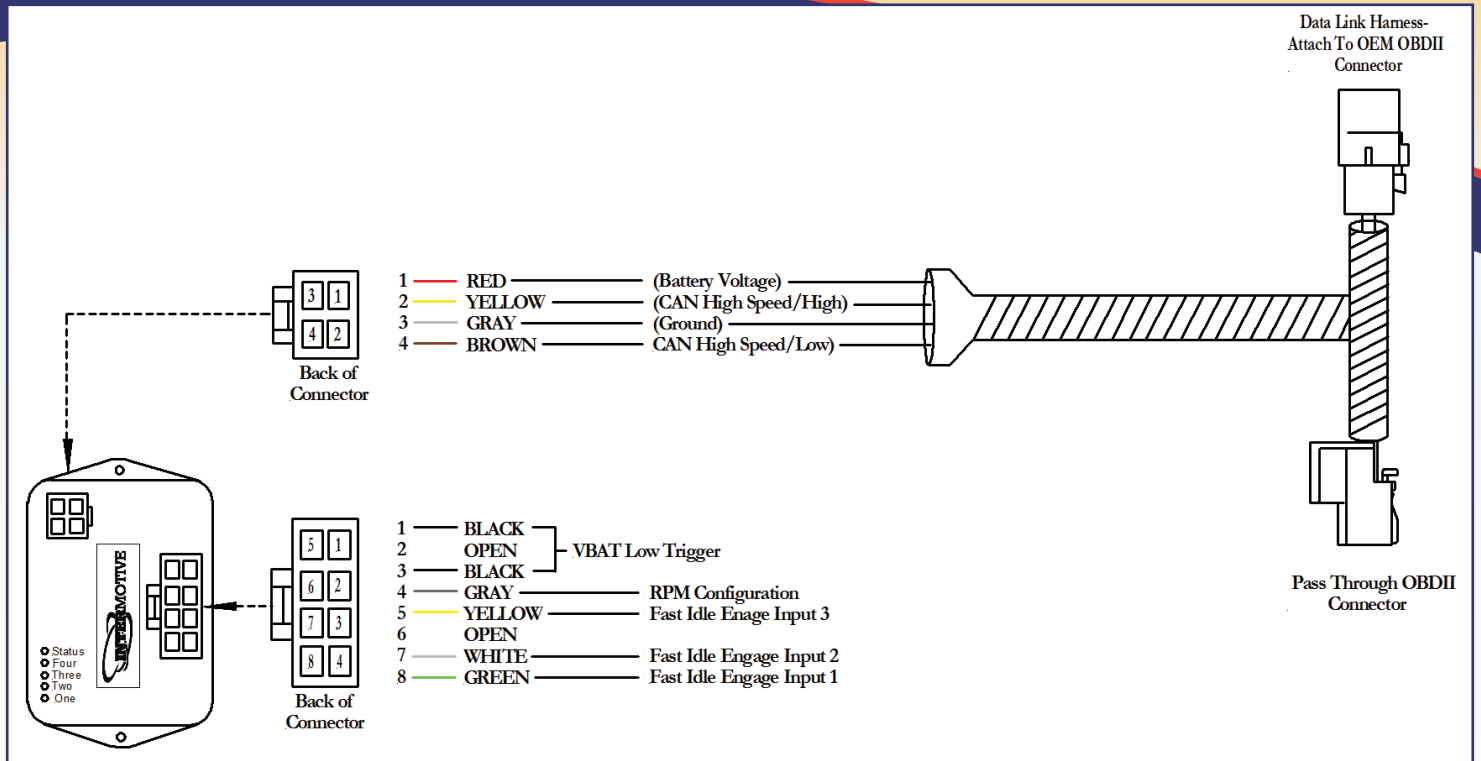

SPECIFICATIONS

Number of Inputs	Three
Current Draw	~ 60 mA
Quiescent Draw	~ 15 mA (sleep current)
CAN Speed	High speed
Temperature Range	-40°C to 80°C
Dimensions	3" L x 2" W x 1" H