

# Camera Controller Module

## *Expanded View Safety System*



### Overview

- Activates up to three cameras by providing three outputs to trigger system (left and right turn, and Reverse)
- Increases the driver's range of vision while the vehicle is in motion
- Reduces labor and warranty costs

### Features

- Cameras are continuously enabled when the turn signals are activated or when the transmission is in Reverse
- Provides additional safety interlock output that can be used for slide out or other vehicle function
- Built-in self diagnostics
- Perfect for vehicles with limited lines of sight including buses, work trucks and RVs
- Simple plug and play connections; no cutting of factory wires
- Includes Intermittent Fault Filter™ (IFF) technology to eliminate false readings


Proudly distributed by



775-831-2002 | [www.InterMotive.net](http://www.InterMotive.net)

## Specifications

### EXAMPLE SCHEMATIC

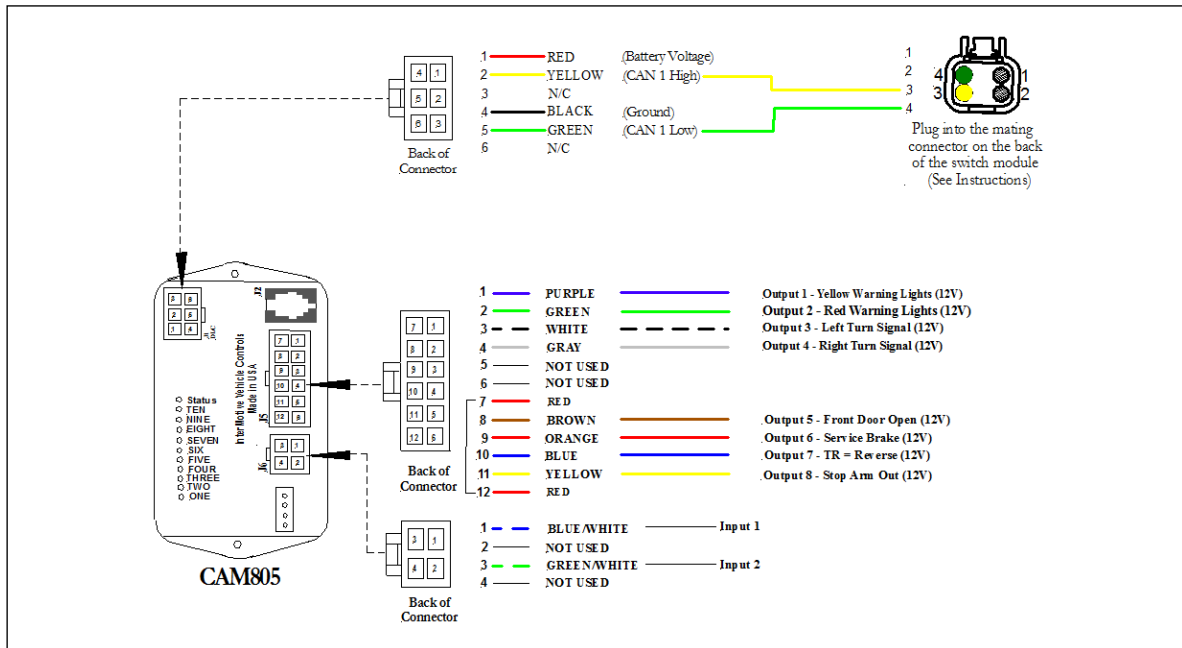

### SPECIFICATIONS

Number of Inputs	0
Number of Outputs	Eight (six high true outputs and two low true output)
Current Draw	~ 60 mA
Quiescent Draw	~ 2 mA (sleep current)
CAN Speed	High and medium speed
Temperature Range	-40°C to 80°C
Dimensions	3" L x 2" W x 1" H