Camera Controller Module

Expanded View Safety System





Overview

- Activates up to three cameras by providing three outputs to trigger system (left and right turn, and Reverse)
- Increases the driver's range of vision while the vehicle is in motion
- · Reduces labor and warranty costs

Features


- Cameras are continuously enabled when the turn signals are activated or when the transmission is in Reverse
- Provides additional safety interlock output that can be used for slide out or other vehicle function
- · Built-in self diagnostics
- Perfect for vehicles with limited lines of sight including buses, work trucks and RVs
- Simple plug and play connections; no cutting of factory wires
- Includes Intermittent Fault Filter[™] (IFF) technology to eliminate false readings





Specifications

EXAMPLE SCHEMATIC

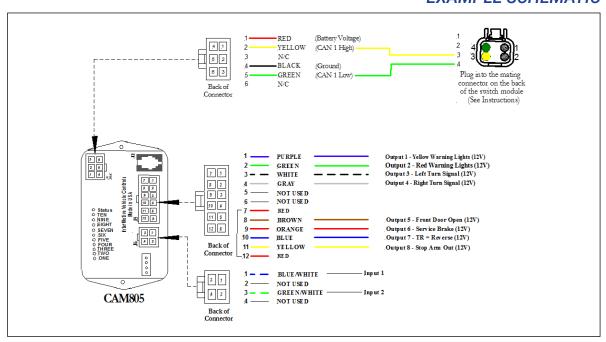

SPECIFICATIONS	
Number of Inputs	0
Number of Outputs	Eight (six high true outputs and two low true output)
Current Draw	~ 60 mA
Quiescent Draw	~ 2 mA (sleep current)
CAN Speed	High and medium speed
Temperature Range	-40°C to 80°C
Dimensions	3" L x 2" W x 1" H

